


# QUAD

## 150 CL3 & 250 CL3




### DIMENSIONS

#### • QUAD 150 CL3

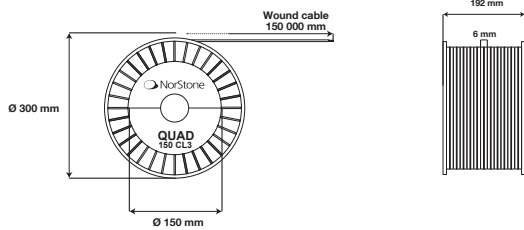

#### • QUAD 250 CL3

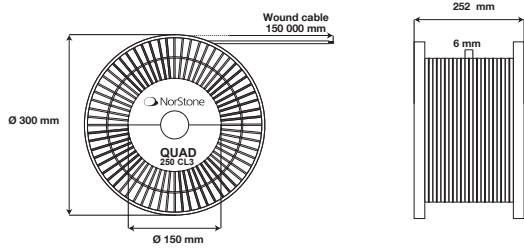

### SPECIFICATIONS



Loudspeaker



Amplifier

### CABLES LENGTH

1 x 150m QUAD 150 .....	3700795184585
	NORQUAD150150
1 x 150m QUAD 250.....	3700795184578
	NORQUAD250150

### DESCRIPTION

The Nortstone Quad speaker cable has a PVC jacket and four semi-rigid conductors surrounded by an aluminum strip. CL3, it withstands a temperature of 80 ° / 176°F, delays its combustion and releases less toxic gas in case of fire. 99.999% OFC, it offers excellent performances with better dynamics and a more intelligible sound message.

### DESIGN

Shape : *Round section, colour code*  
 Finition : *Matt white flexible PVC sheath*  
 Marquage : *Optimal cable direction*

### SHEATH 150 CL3

Structure : *Cuivre 99.999% OFC - CL3 Fire retardant (80°C /176 °F)*  
 Resistance : *0.01428 Ω*  
 Capacitance : *205.170 pF/m*  
 Section : *4 x 1.5 mm<sup>2</sup>, outer diameter 6 mm*  
 Length : *150m*

### CONDITIONING 150 CL3

Quantity/spool : *1*  
 Type : *spool*  
 Dimensions (L x H x P) : *320 x 320 x 282 mm*  
 Net weight : *14,5 kg*  
 Gross weight : *15,2 kg*

### SHEATH 250 CL3

Structure : *Cuivre 99.999% OFC - CL3 Fire retardant (80°C /176 °F)*  
 Resistance : *0.00873 Ω*  
 Capacitance : *275.160 pF/m*  
 Section : *4 x 2.5 mm<sup>2</sup>, outer diameter 6 mm*  
 Length : *150m*

### CONDITIONING 250 CL3

Quantity/spool : *1*  
 Type : *spool*  
 Dimensions (L x H x P) : *320 x 320 x 222 mm*  
 Net weight : *21,0 kg*  
 Gross weight : *21,7 kg*